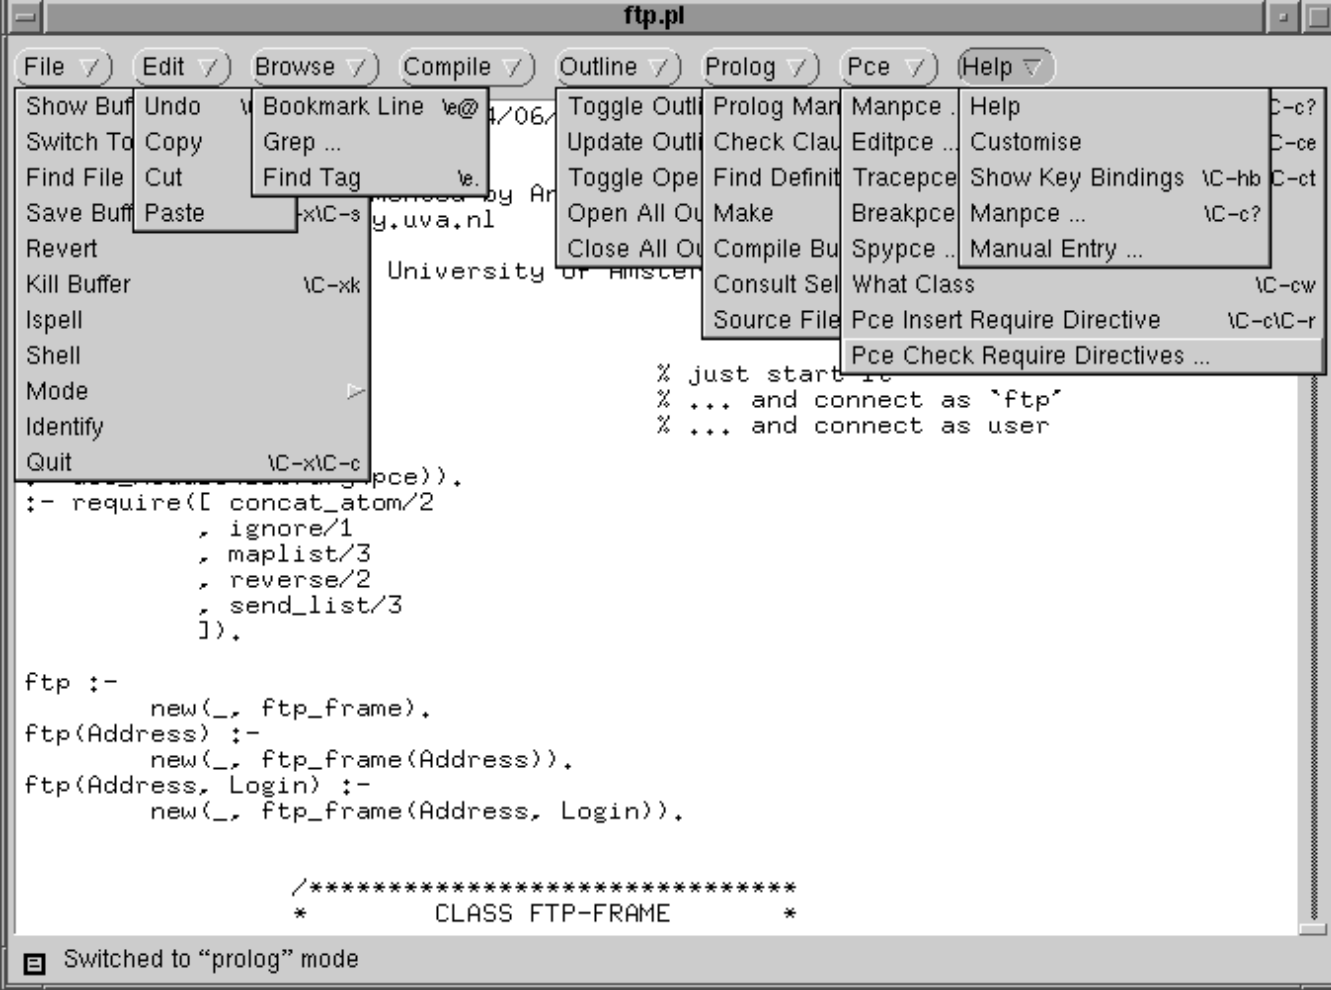
ftp.pl
File
Edit
Browse
Compile
Outline
Prolog
Pce
Help
Show Buf
Switch To
Find File
Save Buff
Revert
Kill Buffer \C-xk
Ispell
Shell
Mode
Identify
Quit \C-x\C-c
Undo
Copy
Cut
Paste
Bookmark Line \e@
Grep ...
Find Tag \e.
Toggle Outli
Update Outli
Toggle Ope
Open All Ou
Close All Ou
Prolog Man
Check Clau
Find Definit
Make
Compile Bu
Consult Sel
Source File
Manpce ..
Editpce ...
Tracepce
Breakpce
Spypce ...
What Class \C-cw
Pce Insert Require Directive \C-c\C-r
Pce Check Require Directives ...
Help
Customise
Show Key Bindings \C-hb
Manpce ... \C-c?
Manual Entry ...
% just start it
% ... and connect as `ftp'
% ... and connect as user
:- require([concat_atom/2
, ignore/1
, maplist/3
, reverse/2
, send_list/3
]).
ftp :-
new(_, ftp_frame).
ftp(Address) :-
new(_, ftp_frame(Address)).
ftp(Address, Login) :-
new(_, ftp_frame(Address, Login)).
/*********************************
* CLASS FTP-FRAME *
Switched to “prolog” mode